

# ADDENDUM NO. 1

## ROCK RIVER WATER RECLAMATION DISTRICT 2018-2019 SANITARY SEWER SERVICE REPAIRS CAPITAL PROJECT NO. 1901

This Addendum Number 1, dated May 9, 2018 for the above referenced project, supersedes all contrary and conflicting information in the specifications and contract documents, which are hereby supplemented or revised as follows:

### PROJECT SPECIFICATIONS

1. Article 3, Part 5, Sanitary Sewer Service Cleanout Installation
  - a. Add the following to *Article 3, Part 5.2, Existing Pipe Cleaning*:


Contractor shall verify the sewer service pipe is free of obstructions from the proposed service cleanout to the sanitary sewer main by means of television inspection. The camera used for televising the service pipe shall be a push service camera. Markings shall be made on the push camera cable to measure distance, and distances shall be verified from above ground with a tape. Lighting and camera quality shall be suitable to provide a clear, in-focus picture of the entire inside periphery of the service pipe.

A District Inspector shall be present for the televising of each sewer service pipe. Should the Contractor encounter roots or other obstructions which they are unable to remove from the service pipe with hand tools, the District Inspector shall be notified. Contractor shall make an additional valid attempt to remove the obstruction via hand tools with the District Inspector present. If the obstruction is unable to be removed by hand tools, as verified by the District Inspector, the District will schedule to remove the obstruction with the necessary power equipment within 48 hours of notification.


This information shall be taken into consideration when preparing your bid. This addendum will be E-mailed to all plan holders as well as posted to the District's website at [www.rwrwd.dst.il.us](http://www.rwrwd.dst.il.us).

**END OF ADDENDUM NO. 1**

Issued May 9, 2018  
Rock River Water Reclamation District

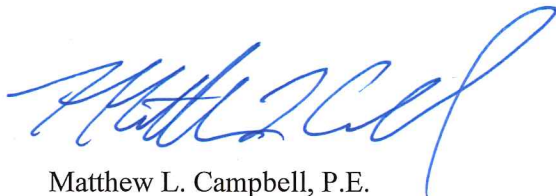

Matthew L. Campbell, P.E.  
Project Engineer

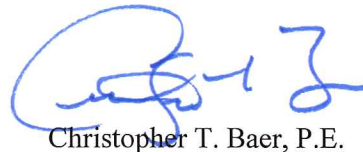

Christopher T. Baer, P.E.  
Engineering Manager